

**Product:** KLUDI BALANCE electronic controlled basin mixer DN 10

**Ref.:** 5210005

### Product description

electronic controlled basin mixer DN 10  
 single hole mounted  
 flow class Z, flow rate 7,6 l/min  
 PCA cascade aerator M 24 x l with anti-theft device  
 magnet-cartridge unit, with presettable temperature control handle  
 optical object-registration  
 electronic unit with battery control device  
 6 V Lithium Battery CR-P2, anti theft  
 integrated back flow preventer  
 rapid installation set  
 flexible high pressure supply tubes G 3/8 with dirt catcher sieves  
 noise group I, protected against vandalism

Finishes:  
 05 chrome

### Advertisement


- \* KLUDI GmbH & Co KG KLUDI BALANCE electronic controlled basin mixer item no. 5210005 DN 10
- \*\* 6 V Lithium Battery CR-P2
- \*\*\* temperature control handle
- \*\*\*\* chrome plated brass, DIN 50930-6, ajar to DIN EN 15091

Electronic controlled basin mixer DN 10, manufacturer KLUDI GmbH & Co KG KLUDI BALANCE item no. 5210005, DN 10, chrome plated brass DIN 50930-6, as electronic controlled pillar tap, according to technical requirements DIN EN 15091 and VDE 0630 part 12/09.88, electronic = electromagnetic compatibility proofed, flexible high pressure supply tubes length 365 mm with metal body 3/8 inch with DVGW / KIWA / WRAS / CSTB approval (W543/W270), noise level DIN 4109 group I, without report no., PCA cascade aerator M 24 x l with anti-theft device, control electronic with programming options, activation optoelectronic, with 6 V Lithium Battery CR-P2, safety class IP 65, with presettable temperature control handle, flow class Z (max. ~ 7,6 l/min at 3 bar), max. warm water intake temperature 65 °C (as scald protection), with activatable/deactivatable 24 h automatic flush, with functional reliability magnet-cartridge unit, protected against vandalism, with integrated sensory window, valve closed in rest position, with back flow preventer, rapid installation system, projection in mm 129, spout height in mm 106/129,5, total height in mm 129,5, with adjustable water run-time (0,1 – 5 sec.), with 2 minutes short-off function, with (set/free adjustable) hot water safety device via mixing shaft, for pressure type water heater, for continuous line heater, PN 10 (but if static pressure greater than > 5 bar install a pressure reducer), (the Battery is for anti-theft device internal the fitting, but still easy to maintain)

### Product picture



### Dimensional drawing

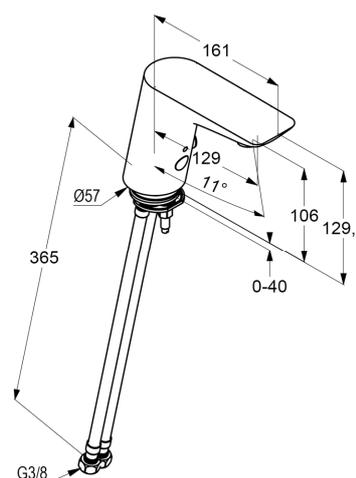

### Flow rate diagram

