

Product: KLUDI E-GO electronic and single-lever controlled sink mixer DN 15

Ref.: 422150575

Product description

electronic and single-lever controlled sink mixer DN 15
 single hole mounted, solid lever
 ceramic cartridge with hot water safety device
 aerator M 16,5 x 1
 water flow regulator 8,0 l/min
 adjustable temperature through lever employment
 sensory operation, automatic sensory measuring
 with optional hygienic flushing every 12 or 24 hours
 electronic unit with battery control device
 6 V Lithium Battery CR-P2, with magnet-cartridge unit,
 swivelling spout (360°), removable spout,
 back flow preventer with dirt-catcher sieve, protected against back
 flow, rapid installation set, flexible high pressure supply tubes 3/8 inch

Finishes:
 05 chrome

Product picture




Advertisement

electronic and single-lever controlled sink mixer, manufacturer KLUDI GmbH & Co. KG
 KLUDI E-GO item no. 422150575

type: electronic and single-lever controlled sink mixer, DN 15 / PN 10 with flexible
 hose, with swivel spout (360°) and removable hand spout, chrome plated brass, as
 sink mixer with electronic controls or as single-lever mixer, solid lever chrome plated
 metal, ceramic cartridge with hot water safety device, aerator M 16,5 x 1, with water
 flow regulator 8,0 l/min, actuation lever flow rate 9,5 l/min at 3 bar, electronic activa-
 tion flow rate approx. 4,1 l/min at 3 bar, battery powered using 6 V Lithium battery
 CR-P2, control electronics with programming options, activation optoelectronic or via
 lever, max. warm water intake temperature 65°C (as scald protection), with activat-
 able cleaning mode for maintenance purposes, optional hygienic flushing every 12 or
 24 hours, with magnet valve and dirt-catcher sieves as integrated unit within the
 fitting, with integrated sensor window, automatic valve closed after 90 sec. if optical
 unit under sensory operation, with backflow preventer on the intakes, protected
 against back flow, flexible high pressure supply tubes 3/8 inch with DVGW / W270
 approval, rapid installation set

dimensions: height: 472 mm, nozzle height: 250 mm, projection: 236 mm
 for pressure type water heaters and for continuous line water heaters
 operation at pressures > 5 bar requires a pressure reducing valve

Dimensional drawing

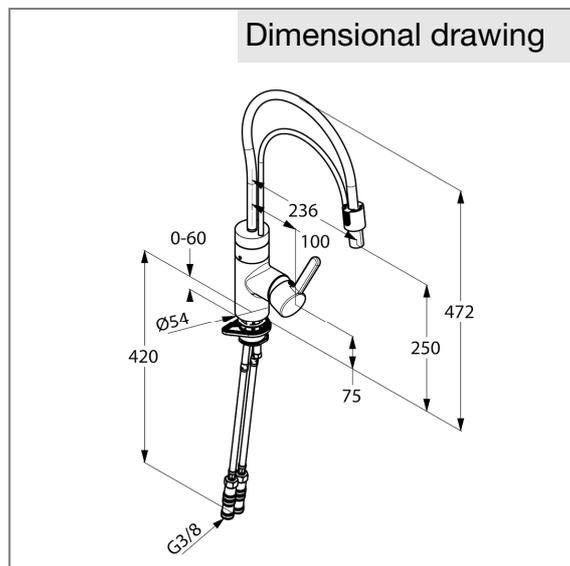

Flow rate diagram

